

Get your POS solution now at



1300 888 POS op-tech.com.au

point of sale system · security system · business intelligence

v5 POS



IP54 Whole Unit



Removable SSD*



Aluminium Die-cast
Sleek Enclosure

SE~~N~~OR

SENROR v5POS Series Touch POS Terminal


Senor v5POS series feature a brand new concept with an **ultra-narrow bezel-less screen** and **sleek exterior design**, with interchangeable frame and casing to match the retailer's style.



v5POS is an **energy-efficient solution** with low power consumption on a high-performing platform. The CPU consumes less power, generates less heat and helps to keep our environment green.


With its **elegant design**, v5POS is ideally suited for the retail and hospitality industries' flagship and pop-up stores.

I/O Connector

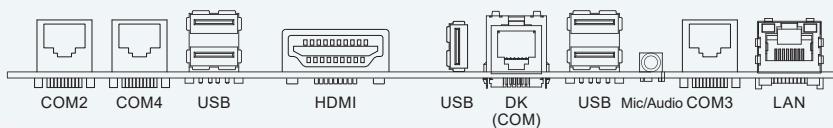

v5POS J64

3 x Serial | 1 x Cash Drawer | 5 x USB | 1 x HDMI

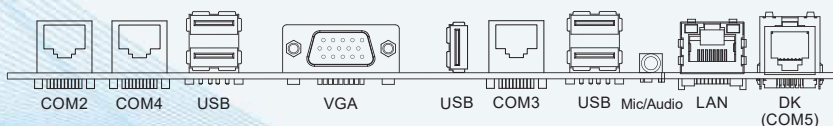

v5POS X35

3 x Serial | 1 x Cash Drawer | 5 x USB | 1 x VGA

Optional Accessories



Wireless LAN



10" / 15" Customer Display



MSR / Fingerprint / RFID Reader




VFD Customer Display




Coloured Frame*

Features

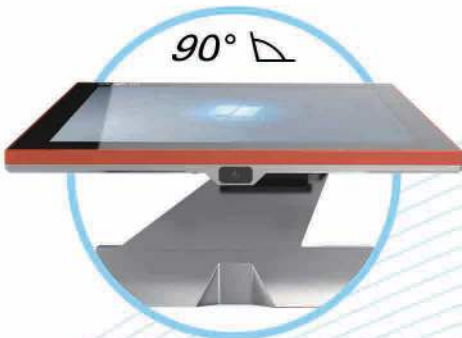

90 Degree Tilt Adjustment

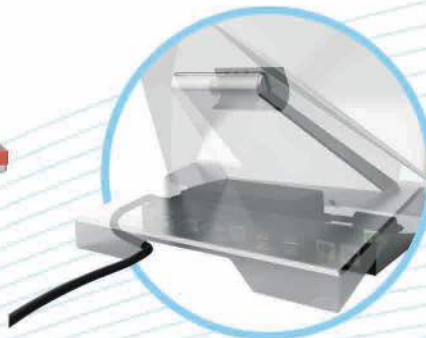

Internal Power Supply
Cable Management System



Fanless / Ventless / Screwless

* Coloured units are for special order only.



SPECIFICATIONS

	v5POS J64	v5POS X35
PROCESSOR	Intel Celeron Quad Core J6412 1.5 GHz (Turbo Boost up to 2.6 GHz)	Intel Dual Core i3-6100U 2.3 GHz
SYSTEM MEMORY	4 GB DDR4 RAM (up to 32 GB)	4 GB DDR4 RAM (up to 32 GB)
STORAGE DEVICE	1 x M.2 SATAIII 2242 SSD 1 x removable M.2 PCIe 2280 SSD	Half Slim removable SATA SSD (up to 240 GB, supports RAID)

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	350 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch

I/O INTERFACE

USB PORT	4 x USB 2.0, 2 x USB 3.0	6 x USB 2.0
SERIAL PORT	3 x RJ50	1 x DB9, 2 x RJ50
VIDEO PORT	1 x HDMI	1 x VGA
AUDIO PORT	1 x 3.5 mm Mic in / Line out 2 x 2W speaker	
CASH DRAWER	1 x RJ12 (24 V)	
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps	

OPERATING SYSTEM

WINDOWS	10 IoT / 10 Pro / 11	10 IoT / 10 Pro
----------------	----------------------	-----------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	365 (W) x 290 (H) x 193 (D) mm 5.5 kg
CHASSIS MATERIAL	Die-cast aluminium with Nano-technology coating
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90%
POWER CONSUMPTION	12 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz, 13.56 MHz)
CUSTOMER DISPLAY	10" / 15" TFT LCD or 2-line VFD
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue/Purple (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.